
'ORIENT' Brand

Standard/Mini HYDRAULIC TROLLEY JACKS





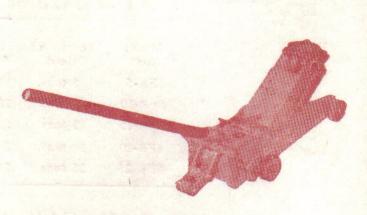

MINI

SPECIFICATIONS:

	Standard Trolley Jacks		Mini Trolley Jacks
	Model HT/5	Model HT/10	Model Mini 1½
Rated Capacity in Tons	The side 5 and the	10	$1\frac{1}{2}$
Saddle Low Point in mm.	175	280	130
Saddle High Point in mm.	360	560	400
Total Lifting Range in mm.	385	460	270
Frame High Point in mm.	200	200	150
Length of Frame in mm.	1370	1500	660 /-
Length of Handle in mm.	1050	1050	760
Length of Extended in mm.	2350	2525	1400
Width (Widest Point) in mm.	430	430	260

N.B.—Ideally suited the Auto Service these Jacks are light weight but ruggedly built for duilt for durable and dependable service

Marketing-

Oriental Trading Corporation

33/1, NETAJI SUBHAS ROAD, "Marshall House", G. P. O. BOX No. 2459
CALCUTTA - 700 001

Tele Fax: 033-2209759 Phone: 220-9557

^{***} Design & Specifications are Subject to alteration for sake of improvement without notice 25% overload tes certificates furnished with each Jack.

^{***} Manufacturing tolerance + 10 mm.